


ALL COMPONENTS MUST COMPLY WITH THE EUROPEAN DIRECTIVE ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES (RoHS).
CHECK REVISION AND STATUS BEFORE USE.

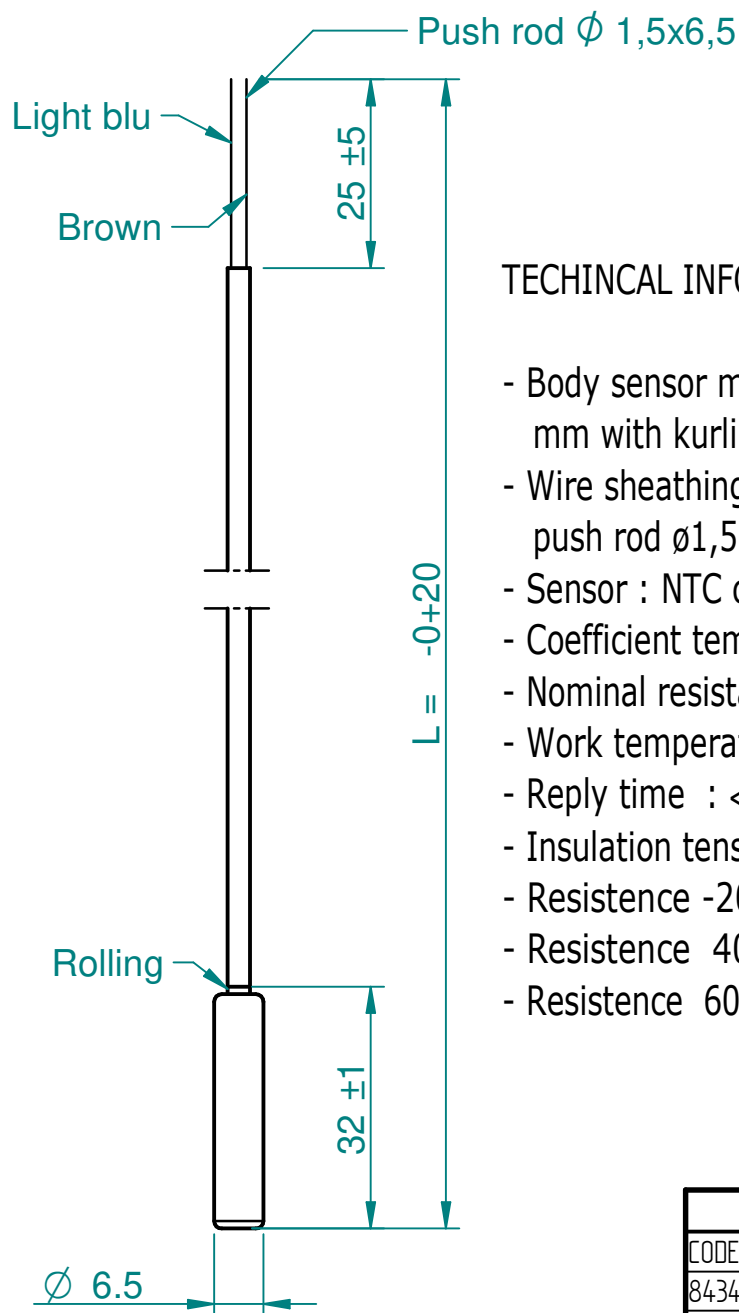

TECHINICAL INFORMATIONS :

- Body sensor material : Copper pipe Ø6,5 x 32 mm with kurling
- Wire sheathing : PVC 2 or 3 x 0,50 mm² with two push rod ø1,5 x 6,5
- Sensor : NTC code N1139 da 10Kohm a 25°C
- Coefficient temperature : $\beta_{25/85} = 3977K \pm 0,75\%$
- Nominal resistance (25°C) : 10000 $\Omega \pm 3\%$
- Work temperature: -10° ÷ +90°C
- Reply time : < 10sec. (25° - 85 °C - 63.2%)
- Insulation tension : 1500 Vac(1")
- Resistance -20°C : 96125 Ω
- Resistance 40°C : 5332 Ω
- Resistance 60°C : 2492 Ω

DERIVED CODE LIST	
CODE	LENGHT
843492	1400
7664123	4000
7856800	1650

		DIRS	
Change Description			Refers To
DIMENSION TOLERANCE TO ISO 14405 A4 Sheet No.: 1 of 1 Units : mm Scale : 2:1		Tolerance: Material specification: Creator: Date of Issue:	
First Angle Projection 		Title: PROBE SENSOR L4000MM Release Status: Work In Progress When Blank Item Number : Revision :	

THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPRESS AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGE.
ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN.